

Compact Software - Quanika

Quanika Compact software unleashes the power of Axis hardware, making it easy to integrate controllers for unlimited doors and users, and to integrate AXIS Camera Station as well as Milestone video management software (VMS). Without cost and complexity,

Quanika Compact is now a top choice for small-to-medium applications in healthcare, retail, manufacturing, logistics and more, giving the ability to tie together and flexibly manage multiple sites.

Entry-Level Systems

The Quanika Compact starting package allows you to integrate from 2 doors up to 20 doors, with the option to link in up to 16 cameras and bolt-on intercom and intruder software licenses. And you only pay for what you need.

Mid-Sized Systems

With licenses for up to 128 doors and 128 cameras, you can upscale and integrate systems for larger sites, and multiple sites, from secure internal areas right out to the perimeter.

And you can enhance customer experience by automating visitor management and taking advantage of big data intelligence from video analytics. Quanika lets you increase operational efficiency and reduce risk



Compact software has been developed on the Axis hardware products

AXIS A1001 Network Door Controller	AXIS A1601 Network Door Controller
<ul style="list-style-type: none"> • AXIS A9161 Network I/O Relay Module • AXIS A9188-VE Network I/O Relay Module • AXIS Camera Station Software 	<ul style="list-style-type: none"> • AXIS A9188 Network I/O Relay Module e • AXIS Door Station hardware • AXIS Audio network hardware

Functions & Features

Software server	Unlimited Support Rules and Routines
<ul style="list-style-type: none"> • Integration Axis Camera station • Alarm Management System • Include Interactive Graphical Floor plans • Unlimited Access Groups, • Unlimited Cardholders • Support Unlimited Inputs/Outputs • Elevator Control • Soft & Hard Timed Antipassback • Unlimited Support Rules and Routines • 3rd Party Database Integration • Multilingual Support • ID Badging • Hotel System Integration - Assa Abloy 	<ul style="list-style-type: none"> • Manual Control to control doors, sensors and outputs • Data Exchange Service module. • 100,000 offline transactions support per Controller • Events management • Sensor / Outputs management • Unlimited Card formats up to max 80bit card • Time and Attendance • Mustering System • Integrations with Intercom Systems • Interface with Visitor Management System • Compact Web base software • Integration to Milestone CCTV • Dual screen support

PC, Server Specifications

Basic Requirements


- Windows® 7, Windows® 8 and 8.1, 10, Windows Server 2008 and 2008 R2, Windows Server 2012 and 2012 R2, Windows Server 2016 and 2016 R2, Windows Server 2018 and 2018 R2
- QUAD Core Processor or better (Core Ix or XEON)
- 16 GB ECC SDRAM minimum
- 300 GB minimum hard disk drive
- 100/1000 Ethernet NIC
- CD/DVD
- 16 MB video card or better (If CCTV Interface is used, the video card memory should increase to min 1 GB)

Database Requirements

Basic Requirements

- SQL Server 2012 and 2012 R2
- SQL Server 2016 and 2016 R2
- SQL Server 2018 and 2018 R2
- Express edition of software will be loaded with software. Based on requirements customer can choose what license they require

Compact Access Control, CCTV Schematic

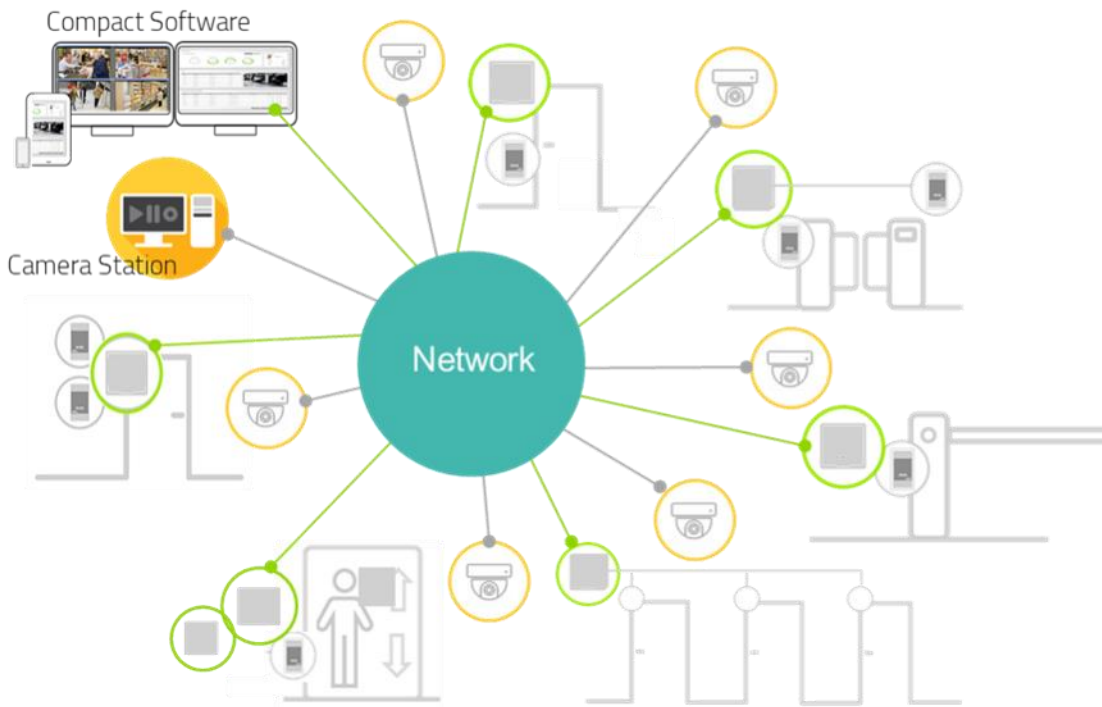

Compact Software Dual Screens



Quanika

Q House,
45 Boeing Rd,
Airways Industrial,
Dublin, D17R928,
Ireland,

email: info@quanika.com
Tele: +44(0) 8450 531716
web: www.quanika.com